

Cables

Bulk Cables

ProAV CI162

- 2-core speaker cable with overall sheath
- 16AWG per core
- 65 strands for flexibility
- PVC sheath and dielectric
- UL/CL3 rated for in-wall or in-ceiling use
- Metre marked (reverse metres)
- Supplied in 152m pull-through box



ProAV CI164

- 4-core speaker cable with overall sheath
- 16AWG per core
- 65 strands for flexibility
- PVC sheath and dielectric
- UL/CL3 rated for in-wall or in-ceiling use
- Metre marked (reverse metres)
- Supplied in 152m pull-through box



ProAV CI182

- 2-core speaker cable with overall sheath
- 18AWG per core
- PVC sheath and dielectric
- UL/CL3 rated for in-wall or in-ceiling use
- Metre marked (reverse metres)
- Supplied in 305m pull-through box




ProAV MC128

- Professional, shielded mic cable (two cores)
- 2 x 0.35sqmm conductors, 11 strands each
- PVC outer sheath and dielectric
- Metre marked (reverse metres)
- Supplied in 152m pull-through box



ProAV Cat5e

- High speed Cat5e data cable (100MHz)
- 24AWG bare copper conductors
- Metre marked on outer jacket
- Supplied in 305m pull-through box
- Available in blue or grey

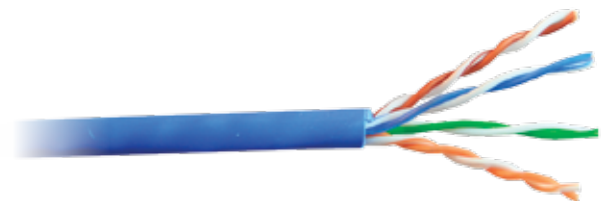

Cables

Bulk Cables



ProAV Cat6

- High speed Cat6 data cable (350MHz)
- 23AWG bare copper conductors
- Inner spacer to maintain formation and minimise crosstalk
- Metre marked on outer jacket
- Supplied in 305m pull-through box
- Available in blue



ILC100M

- Flat copper tape for under-carpet induction loop (hearing aid) installation
- Overall size 15mm x 0.45mm
- 2.5 sqmm copper passes high loop currents
- Rugged PET insulation
- Supplied on 100m spool, metre marked and printed with 'do not cut' warning



RG6 Quad Shield

- Quality RG6 co-axial cable with quad shield
- Combats the heaviest outside interference
- Supplied in 305m pull-through box



ProAV Soprano / Soprano Biwire

- Heavy duty 14AWG OFC speaker cable in single or two-pair configuration
- Cylindrical outer sheath
- Metre marked on outer jacket
- Supplied on 50m spool



ProAv Alto / Alto Biwire

- Heavy duty 14AWG OFC speaker cable in single or two-pair configuration
- Metre marked on outer jacket
- Supplied on 76m spool

Cables

Terminated Audio Cables

Peavey XLR cables

- Heavy duty professional cable with industry-standard XLR connector on each end
- 10/25/50 foot lengths (3.0/7.6/15.2m)



Peavey Speakon cables

- 16 gauge professional speaker cable with NL2FC Speakon connector on each end
- 25/50 foot lengths (7.6/15.2m)



Peavey 6.35mm speaker cables

- 16 gauge professional speaker cable with 6.35mm connector on each end
- 25/50 foot lengths (7.6/15.2m)



ProAV Stereo RCA

- 24K gold-plated connectors on both ends
- multi-strand copper conductors
- dual shielding minimises interference
- 1m, 2m or 4m lengths



ProAV Subwoofer cable

- 24K gold-plated connector on both ends
- Multi-strand copper conductor
- Dual shielding minimises interference
- 2m, 4m, 6m or 8m lengths



ProAV Optical

- TOSLINK connector on each end
- 24K gold-plated connector tip surround protects lens from damage
- High-strength fibre cladding maintains refractive index and delivers exceptional strength
- Supplied with mini-TOSLINK adaptor
- 1m, 2m or 5m lengths



Cables

Terminated Video Cables

ProAV Component

- Precision 24K gold plated connectors
- Multi-strand copper conductors provide excellent signal transfer
- Dual-shield design for interference-free pictures
- 1m, 2m or 4m lengths



ProAV HDMI

- 24K gold plated connectors
- High speed with Ethernet (1080p)
- Dense multi-shield provides optimum isolation
- Supplied with one 180degree swivel adaptor to allow connection in tight places (behind equipment)
- 1m, 2m, 3m and 4m lengths



Key Digital Red Iguana HDMI

- 24K gold plated connectors
- High speed with Ethernet
- 3D, Audio return channel
- Engineered for use with all HDTV formats including 1080P)
- 0.9m, 1.8m, 2.7m, 3.6m & 6m lengths



Key Digital Python HDMI

- 24K gold plated connectors
- 3D, Audio return channel & High speed with Ethernet
- Contains special circuit to increase cable run
- LED for power detection and identification of receiving end of cable
- CL3 rated for in wall use
- 9m, 12m, 15m, & 22.5m lengths

